AD3

# 3-Tier Stainless Steel Shoe Locker

AISI 304 STAINLESS



An AISI 304 shoe locker with three lockable, ventilated compartments per column. Four widths with 3, 6, 9 or 12 compartments.



VIEW WITH THE DOORS OPEN

## HIGHLIGHTS

- **AISI 304 throughout** — Stainless body, doors and frame; no painted panels.
- **Hygienic form** — A sloping top and raised body make cleaning easier.
- **Four widths** — 417 / 804 / 1191 / 1578 mm; 420 mm deep.

## TECHNICAL DATA

| | |
|---|---|
| MATERIAL | **AISI 304 stainless steel** |
| OVERALL SIZE (W×D×H) | **417 / 804 / 1191 / 1578 × 420 × 2040 mm** |
| COMPARTMENTS AND PERSONS | **3 / 6 / 9 / 12 compartments; 1 person per compartment** |
| COMPARTMENT LAYOUT | **3-tier, lockable compartments** |
| TOP | **Sloping top; nothing is left or settles on it** |
| VENTILATION | **Ventilation pattern in every door** |
| NAMEPLATE | **Name holder on every door** |
| FEET | **Adjustable feet; body raised off the floor so the area beneath can be cleaned** |
| MADE TO ORDER | **Width, number of columns, interior layout and lock type to suit the project** |
| WARRANTY | **2-year manufacturer warranty** |
| TECHNICAL SHEET | **Downloadable technical sheet and dimensioned drawings; manufacturing detail with the quotation** |

## SCOPE OF DELIVERY

- ✓ AISI 304 body, doors and frame
- ✓ Name holder and ventilation on every door
- ✓ Spring-latch lock with padlock eye
- ✓ Adjustable feet

MATERIAL



AD3

# 3-Tier Stainless Steel Shoe Locker


MODELS AND DIMENSIONS

## MODELS

| MODEL | COMPARTMENTS / PERSONS | OVERALL W × D × H (MM) |
|---|---|---|
| AD3x1 | 3 | 417 × 420 × 2040 |
| AD3x2 | 6 | 804 × 420 × 2040 |
| AD3x3 | 9 | 1191 × 420 × 2040 |
| AD3x4 | 12 | 1578 × 420 × 2040 |

Height is taken at the rear edge of the sloping top. Each compartment is assigned to one person. The lock type ends the model code: -K1 Spring-latch lock with padlock eye (standard), -K2 Electronic keypad lock, -K3 Keyed cam lock; e.g. AD3x2-K1.

## DIMENSIONED DRAWING

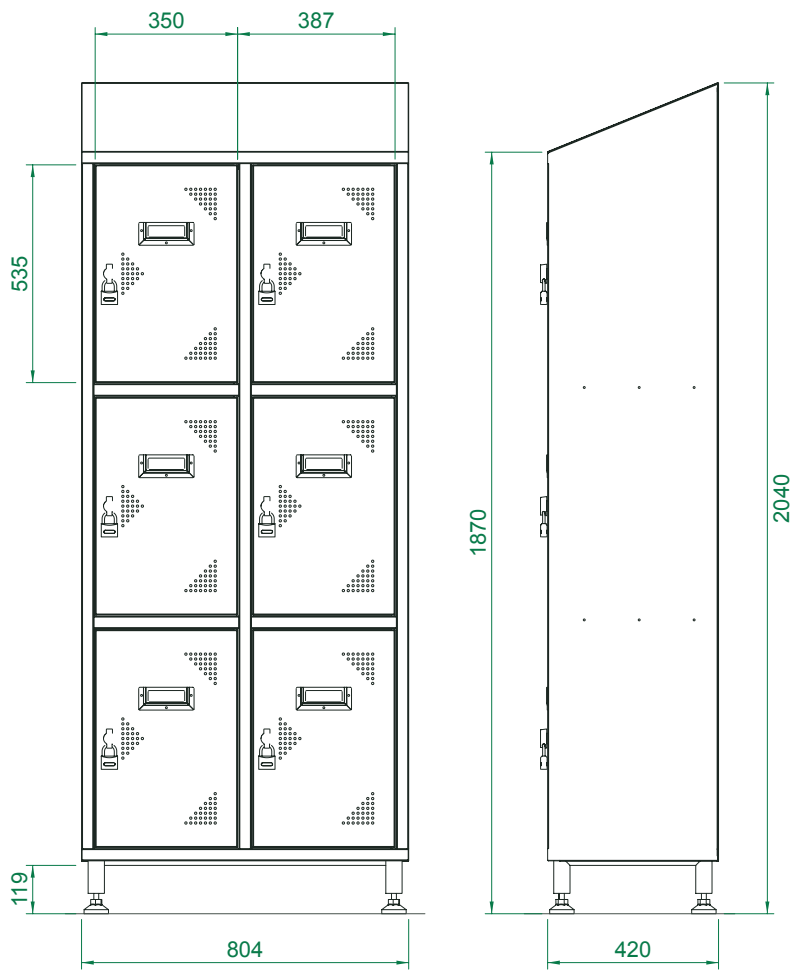


**AD3x2** mm

AD3x2: front and side views. Dimensions in mm, taken from the CAD model.

## DIMENSIONS IN THE DRAWING

| | |
|---|---|
| OVERALL WIDTH | **804 mm** |
| DEPTH | **420 mm** |
| FRONT HEIGHT | **1870 mm** |
| REAR HEIGHT | **2040 mm** |
| DOOR (W × H) | **350 × 535 mm** |
| COLUMN PITCH | **387 mm** |
| FLOOR TO UNDERSIDE OF THE FRAME | **119 mm** |

## LOCK OPTIONS

**K1 · Spring-latch lock with padlock eye**
STANDARD The spring latch catches when the door is pushed shut, and the turn handle has an eye for a padlock.

**K2 · Electronic keypad lock**
OPTIONAL Opened with a code entered on the keypad, so no key or padlock has to be carried.

**K3 · Keyed cam lock**
OPTIONAL A cylinder cam lock operated with a key; only the lock head shows on the door face.

The lock type is fixed at order time, because the door cut-out is made for the selected lock. Using one lock type along a row of lockers simplifies key and spare-part management.