SD1

Single-Tier Stainless Steel Locker

AISI 304 STAINLESS



A full-height AISI 304 locker where long garments hang unfolded, with a shelf above. Four widths with 1, 2, 3 or 4 doors.



VIEW WITH THE DOORS OPEN

HIGHLIGHTS

- **AISI 304 throughout** — Stainless body, doors, shelves and frame; no painted panels.
- **Hygienic form** — A sloping top and raised body make cleaning easier.
- **Four widths** — 367 / 704 / 1041 / 1378 mm; 420 mm deep.

TECHNICAL DATA

MATERIAL	**AISI 304 stainless steel**
OVERALL SIZE (W×D×H)	**367 / 704 / 1041 / 1378 × 420 × 2040 mm**
DOORS AND PERSONS	**1 / 2 / 3 / 4 doors; 1 person per door**
COMPARTMENT LAYOUT	**Full height; shelf and hanger rail**
TOP	**Sloping top; nothing is left or settles on it**
VENTILATION	**Ventilation pattern in every door**
NAMEPLATE	**Name holder on every door**
FEET	**Adjustable feet; body raised off the floor so the area beneath can be cleaned**
MADE TO ORDER	**Width, number of columns, interior layout and lock type to suit the project**
WARRANTY	**2-year manufacturer warranty**
TECHNICAL SHEET	**Downloadable technical sheet and dimensioned drawings; manufacturing detail with the quotation**

SCOPE OF DELIVERY

- ✓ AISI 304 body, doors and frame
- ✓ Shelf and hanger rail in every compartment
- ✓ Name holder and ventilation on every door
- ✓ Spring-latch lock with padlock eye
- ✓ Adjustable feet

MATERIAL

SD1

Single-Tier Stainless Steel Locker


MODELS AND DIMENSIONS

MODELS

MODEL	DOORS / PERSONS	OVERALL W × D × H (MM)
SD1x1	1	367 × 420 × 2040
SD1x2	2	704 × 420 × 2040
SD1x3	3	1041 × 420 × 2040
SD1x4	4	1378 × 420 × 2040

Height is taken at the rear edge of the sloping top. Each door is assigned to one person. The lock type ends the model code: -K1 Spring-latch lock with padlock eye (standard), -K2 Electronic keypad lock, -K3 Keyed cam lock; e.g. SD1x2-K1.

DIMENSIONED DRAWING

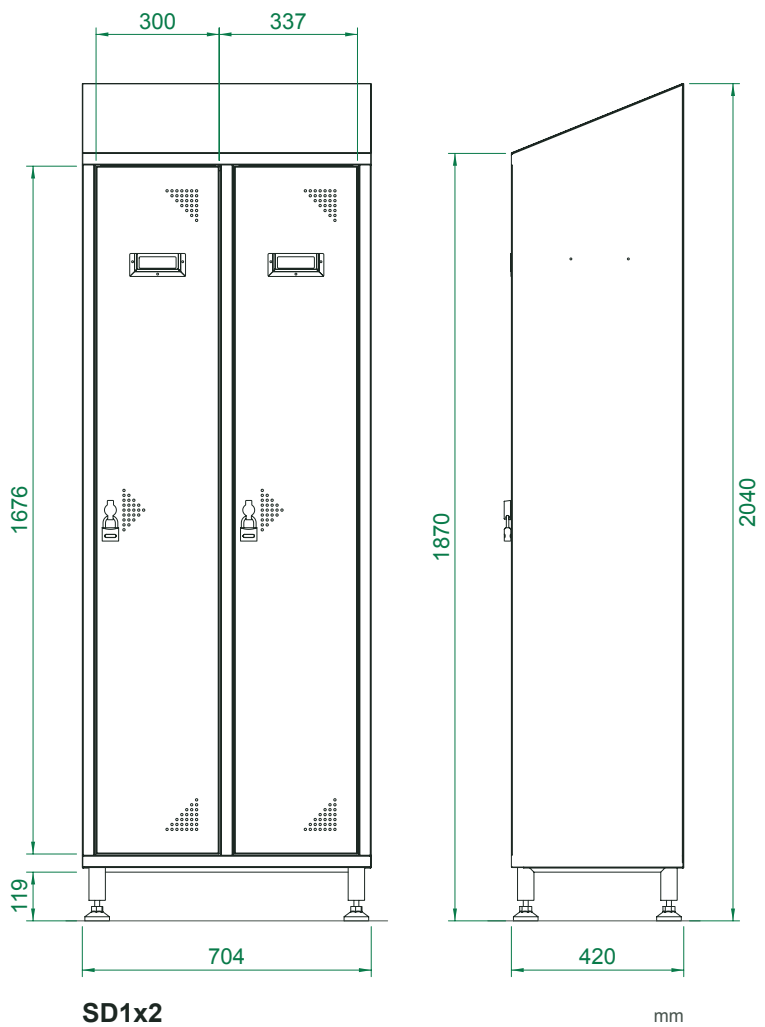

SD1x2: front and side views. Dimensions in mm.

DIMENSIONS IN THE DRAWING

OVERALL WIDTH	704 mm
DEPTH	420 mm
FRONT HEIGHT	1870 mm
REAR HEIGHT	2040 mm
DOOR (W × H)	300 × 1676 mm
COLUMN PITCH	337 mm
FLOOR TO UNDERSIDE OF THE FRAME	119 mm

LOCK OPTIONS

K1 · Spring-latch lock with padlock eye

STANDARD The spring latch catches when the door is pushed shut, and the turn handle has an eye for a padlock.

K2 · Electronic keypad lock

OPTIONAL Opened with a code entered on the keypad, so no key or padlock has to be carried.

K3 · Keyed cam lock

OPTIONAL A cylinder cam lock operated with a key; only the lock head shows on the door face.

The lock type is fixed at order time, because the door cut-out is made for the selected lock. Using one lock type along a row of lockers simplifies key and spare-part management.