SD2

2-Tier Stainless Steel Locker

AISI 304 STAINLESS



An AISI 304 locker with two stacked compartments per column and a sloping top; each compartment has a shelf and hanger rail. Four widths with 2, 4, 6 or 8 doors.



VIEW WITH THE DOORS OPEN

HIGHLIGHTS

- **AISI 304 throughout** — Stainless body, doors, shelves and frame; no painted panels.
- **Hygienic form** — A sloping top and raised body make cleaning easier.
- **Four widths** — 417 / 804 / 1191 / 1578 mm; 420 mm deep.

TECHNICAL DATA

MATERIAL	**AISI 304 stainless steel**
OVERALL SIZE (W×D×H)	**417 / 804 / 1191 / 1578 × 420 × 2040 mm**
DOORS AND PERSONS	**2 / 4 / 6 / 8 doors; 1 person per door**
COMPARTMENT LAYOUT	**2-tier; shelf and hanger rail**
TOP	**Sloping top; nothing is left or settles on it**
VENTILATION	**Ventilation pattern in every door**
NAMEPLATE	**Name holder on every door**
FEET	**Adjustable feet; body raised off the floor so the area beneath can be cleaned**
MADE TO ORDER	**Width, number of columns, interior layout and lock type to suit the project**
WARRANTY	**2-year manufacturer warranty**
TECHNICAL SHEET	**Downloadable technical sheet and dimensioned drawings; manufacturing detail with the quotation**

SCOPE OF DELIVERY

- ✓ AISI 304 body, doors and frame
- ✓ Shelf and hanger rail in every compartment
- ✓ Name holder and ventilation on every door
- ✓ Spring-latch lock with padlock eye
- ✓ Adjustable feet

MATERIAL

SD2


2-Tier Stainless Steel Locker

MODELS

MODEL	DOORS / PERSONS	OVERALL W × D × H (MM)
SD2x1	2	417 × 420 × 2040
SD2x2	4	804 × 420 × 2040
SD2x3	6	1191 × 420 × 2040
SD2x4	8	1578 × 420 × 2040

Height is taken at the rear edge of the sloping top. Each door is assigned to one person. The lock type ends the model code: -K1 Spring-latch lock with padlock eye (standard), -K2 Electronic keypad lock, -K3 Keyed cam lock; e.g. SD2x2-K1.

DIMENSIONED DRAWING

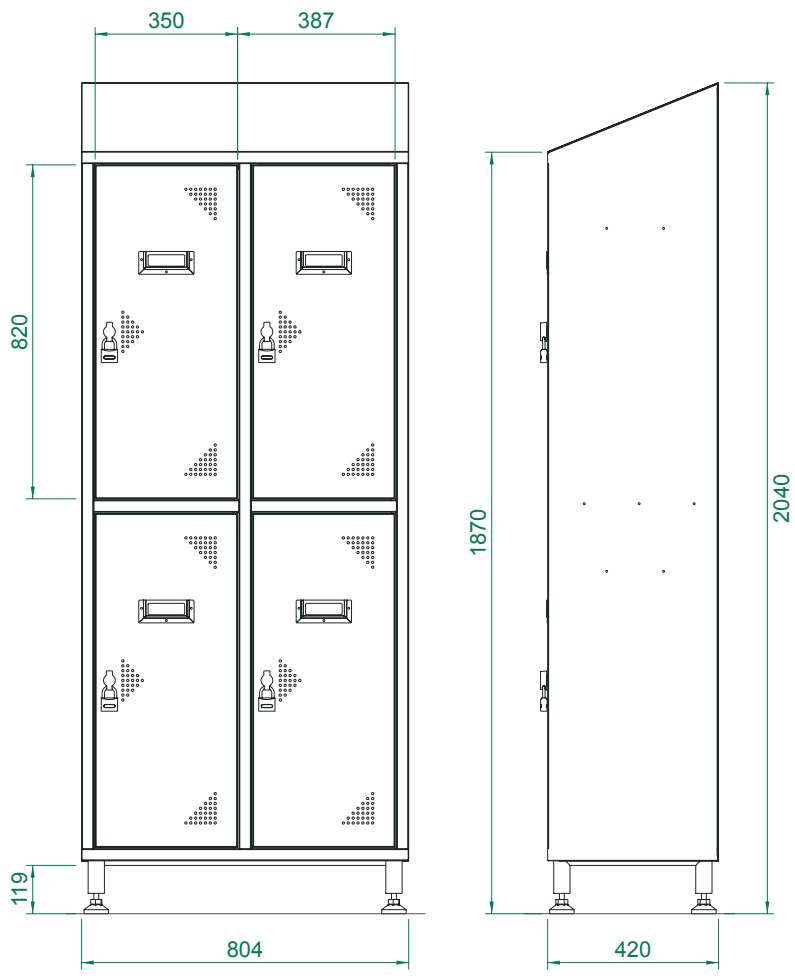

SD2x2 mm

SD2x2: front and side views. Dimensions in mm, taken from the CAD model.

DIMENSIONS IN THE DRAWING

OVERALL WIDTH	**804 mm**
DEPTH	**420 mm**
FRONT HEIGHT	**1870 mm**
REAR HEIGHT	**2040 mm**
DOOR (W × H)	**350 × 820 mm**
COLUMN PITCH	**387 mm**
FLOOR TO UNDERSIDE OF THE FRAME	**119 mm**

LOCK OPTIONS

K1 · Spring-latch lock with padlock eye

STANDARD The spring latch catches when the door is pushed shut, and the turn handle has an eye for a padlock.

K2 · Electronic keypad lock

OPTIONAL Opened with a code entered on the keypad, so no key or padlock has to be carried.

K3 · Keyed cam lock

OPTIONAL A cylinder cam lock operated with a key; only the lock head shows on the door face.

The lock type is fixed at order time, because the door cut-out is made for the selected lock. Using one lock type along a row of lockers simplifies key and spare-part management.